

SA15020

Aluminiumnitrogenmembrane module

Nominal Outlet Flow Rate ⁽¹⁾



Inlet Pressure		Purity (Remaining Oxygen Content)											
		99.5% (0.5%)		99.0% (1.0%)		98.0% (2.0%)		97.0% (3.0%)		96.0% (4.0%)		95.0% (5.0%)	
bar(g)	psi(g)	m3/hr	cfm	m3/hr	cfm	m3/hr	cfm	m3/hr	cfm	m3/hr	cfm	m3/hr	cfm
4.0	58.0	17.0	10.0	25.0	14.7	36.0	21.2	47.0	27.7	57.0	33.5	70.0	41.2
5.0	72.5	23.0	13.5	33.0	19.4	49.0	28.8	66.0	38.8	82.0	48.3	93.0	54.7
6.0	87.0	29.0	17.1	43.0	25.3	63.0	37.1	83.0	48.9	102.0	60.0	120.0	70.6
7.0	101.5	37.0	21.8	53.0	31.2	78.0	45.9	100.0	58.9	125.0	73.6	154.0	90.6
8.0	116.0	44.0	25.9	62.0	36.5	90.0	53.0	117.0	68.9	144.0	84.8	178.0	104.8
9.0	130.5	49.0	28.8	72.0	42.4	103.0	60.6	133.0	78.3	165.0	97.1	216.0	127.1

⁽¹⁾Maximum OutletFlow Rate = 'Nominal Outlet Flow Rate' +15%
m³ reference to standard conditions, 20°C, 1013 mbar(a) and 0% relative water vapour pressure.

For performancefigures atotherpurities and/or pressures, please contact Parker.

Temperature Correction Factors

°C	°F	99.5% (0.5%)	99.0% (1.0%)	98.0% (2.0%)	97.0% (3.0%)	96.0% (4.0%)	95.0% (5.0%)
5.0	41.0	-	-	0.90	0.90	0.90	0.90
≤10.0	50.0	-	-	0.95	0.95	0.95	0.95
20.0	68.0	1.00	1.00	1.00	1.00	1.00	1.00
30.0	86.0	1.00	1.03	1.05	1.05	1.05	1.05
40.0	104.0	1.0	1.05	1.10	1.10	1.10	1.10
50.0	122.0	1.0	1.05	1.10	1.10	1.15	1.15

Product Image*



Operation Parameters


Minimum InletAirQuality	ISO 8573-1: 2010 Class 2.4.1	
Minimum Operating Pressure	4.0 bar(g)	58.0 psi(g)
Maximum Operating Pressure	9.0 bar(g)	130.5 psi(g)
Minimum Operating Temperature	5.0°C	41.0°F
Maximum Operating Temperature	50.0°C	122.0°F
Maximum Pressure Drop	0.2 bar(g)	2.9 psi(g)

Material & Connections

Material	Aluminium
Coating	Powder Coated (Quartz Grey)
Compressed Air Inlet	G2½"
Exhaust	100 mm ØD
Nitrogen Outlet	G2½"

Weight & Dimensions

Weight	46.0 kg	101.4 lbs
Height	1740 mm	68.5"
Diameter	100 mm	3.94"

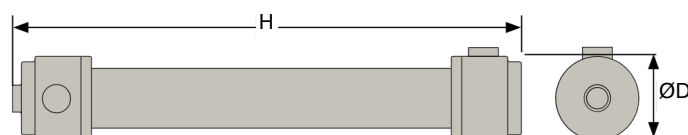

*Image for representation purposes only. Please visit www.parker.com/membranegasseparation to download the engineering drawings and 3D model files, for an exact configuration.

NITROGEN MEMBRANE PART NUMBER CONFIGURATION

Configurator		S	A	1	5	0	2	0	-				-			-	A	-	0	0	A				
Model	Prefix	Purity		Prefix		Pressure		Prefix		Housing		Suf fix													
SA15020	SA15020	95.0%	950	96.0%	960	97.0%	970	98.0%	980	99.0%	990	99.5%	995	4.0 bar(g)	04	5.0 bar(g)	05	6.0 bar(g)	06	7.0 bar(g)	07	8.0 bar(g)	08	9.0 bar(g)	09

Part number configuration should be based on end user requirement to meet their application/process needs.

Example:

	Flow Rate		Purity		Pressure		Housing Material		Suf fix	
Requirement:	135.5m³/hr		@ 95.0%		7.0 bar(g) inlet		Aluminium		00A	
Selection:	154.0m³/hr		950		07		A			
</										



Avilo Stikstof en Persluchtssystemen B.V.

part of interfilter group

Seggeweg 2, 3237 MK Vierpolders

www.avilo.nl

Reference: TSS-DT1506_EN_00

© 2025 Parker Hannifin Corporation

