

IF81 FILTER MAT

Fiberglass filter mat

APPLICATIONS


- Moisture separator in filter installations for gas turbines

BENEFITS

- Low resistance
- Economical in use

SPECIFICATIONS

- Medium: Fiberglass, progressive structure
- Recommended final pressure drop: 250Pa
- Max. continuous temperature: 80°C
- Max. relative humidity: 100%

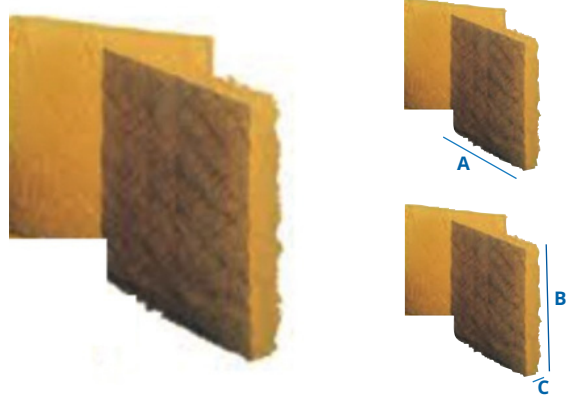

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	DEPTH (C) MM	CAPACITY M3/H	INITIAL PRESSURE DROP
IF81 20x20x3	508	508	75	2500-6100	140
IF81 25x25x3	635	25	75	2500-6300	140

Custom sizes on request.