

G50 A+

Bag filters with fiberglass medium,
filter class ISO ePM10-60%



APPLICATIONS


- Medium filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- Aerodynamic design reduces airflow turbulence
- Tapered stitched bags reduce pressure drop
- Low energy consumption, energy class A+
- High dust-holding capacity
- Long lifespan
- Eurovent certified

SPECIFICATIONS

- Medium: Fiberglass
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Max. continuous temperature: 70°C
- Max. relative humidity: 100%

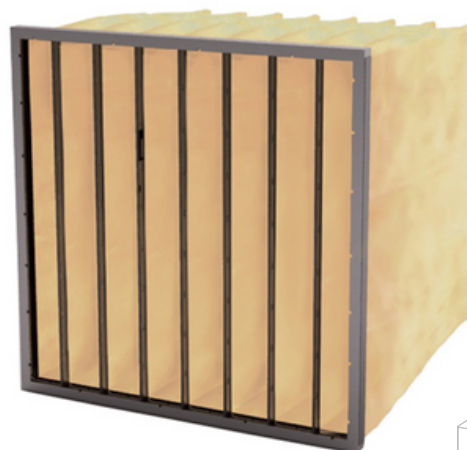

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN 779:2012	FLOW RATE m³/U	ΔP INITIAL	KWH/J 4/21-2018	ENERGY CLASS
G50 592x592x635, 8p	592	592	635	8	ePM10-60%	M5	3400	38	491	A+
G50 288x592x635, 4p	288	592	635	4	ePM10-60%	M5	1700	38	491	
G50 490x592x635 6p	490	592	635	6	ePM10-60%	M5	2800	38	491	
G50 288x288x635, 6p	288	288	635	4	ePM10-60%	M5	850	38	491	
G50 592x592x635, 10p	592	592	635	10	ePM10-60%	M5	3400	38	494	A+
G50 288x592x635, 5p	288	592	635	5	ePM10-60%	M5	1700	38	494	
G50 490x592x635, 8p	490	592	635	8	ePM10-60%	M5	2800	38	494	
G50 288x288x635, 5p	288	288	635	5	ePM10-60%	M5	850	38	494	

Different sizes available on request