

G50

Bag filters with fiberglass medium,
filter class ISO ePM10-60%

APPLICATIONS



- Medium filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- Aerodynamic design reduces airflow turbulence
- Tapered stitched bags reduce pressure drop
- Low energy consumption
- High dust-holding capacity
- Long lifespan
- Eurovent certified via manufacturer Deltrian

SPECIFICATIONS

- Medium: Fiberglass
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Max. continuous temperature: 70°C
- Max. relative humidity: 100%

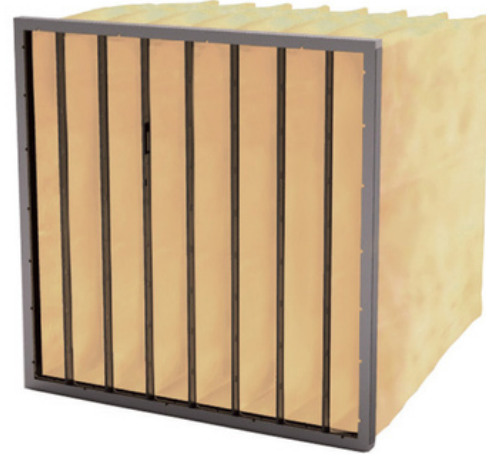

ITEM NO.	DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	CLASS ISO 16890	CLASS EN779:2012 M3/U	AIRFLOW	ΔP INITIAL	KWH/J 4/21-2018
02802	G50 592x592x360, 6p	592	592	360	6	ePM10-60%	M5	3400	80	
05513	G50 288x592x360, 3p	288	592	360	3	ePM10-60%	M5	1700	80	
	G50 490x592x360, 5p	490	592	360	5	ePM10-60%	M5	2800	80	
06737	G50 288x288x360, 3p	288	288	360	3	ePM10-60%	M5	850	80	
06738	G50 592x288x360, 6p	592	288	360	6	ePM10-60%	M5	1700	80	
104054	G50 592x490x360, 6p	592	490	360	6	ePM10-60%	M5	2800	80	
106753	G50 592x892x360, 6p	592	892	360	6	ePM10-60%	M5	5100	80	
106752	G50 288x892x360, 3p	288	892	360	3	ePM10-60%	M5	2550	80	
106417	G50 490x892x360, 5p	490	892	360	5	ePM10-60%	M5	4200	80	
02805	G50 592x592x600, 6p	592	592	600	6	ePM10-60%	M5	3400	43	635
02807	G50 288x592x600, 3p	288	592	600	3	ePM10-60%	M5	1700	43	635
	G50 490x592x600, 5p	490	592	600	5	ePM10-60%	M5	2800	43	635
02808	G50 288x288x600, 3p	288	288	600	3	ePM10-60%	M5	850	43	635
02803	G50 592x288x600, 6p	592	288	600	6	ePM10-60%	M5	1700	43	635
03925	G50 592x490x600, 6p	592	490	600	6	ePM10-60%	M5	2800	43	635
05132	G50 592x892x600, 6p	592	892	600	6	ePM10-60%	M5	5100	43	635
05133	G50 288x892x600, 3p	288	892	600	3	ePM10-60%	M5	2550	43	635
103474	G50 490x892x600, 5p	490	892	600	5	ePM10-60%	M5	4200	43	635

Custom sizes available on request.