

G65

Bag filters with fiberglass medium,
filter class ISO ePM2.5-50%



APPLICATIONS


- Medium filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- The aerodynamic design reduces turbulence in the airflow
- Tapered stitched bags reduce pressure drop
- Low energy consumption
- High dust-holding capacity
- Long lifespan
- Eurovent certified

SPECIFICATIONS

- Medium: Fiberglass
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Max. continuous temperature: 70°C
- Max. relative humidity: 100%

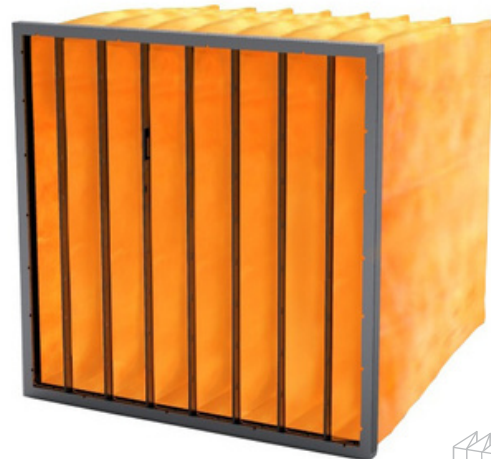

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN 779:2012	FLOW RATE m³/U	ΔP INITIAL	KWH/J 4/21-2018	ENERGY CLASS
G65 592x592x535, 8p	592	592	535	8	ePM2,5-50%	M6	3400	75	1017	C
G65 288x592x535, 4p	288	592	535	4	ePM2,5-50%	M6	1700	75	1017	
G65 490x592x535, 6p	490	592	535	6	ePM2,5-50%	M6	2800	75	1017	
G65 592x592x635, 10p	592	592	635	10	ePM2,5-50%	M6	3400	70	964	C
G65 288x592x635, 5p	288	592	635	5	ePM2,5-50%	M6	1700	70	964	
G65 490x592x635, 8p	490	592	635	8	ePM2,5-50%	M6	2800	70	964	
G65 592x592x635, 8p	592	592	635	8	ePM2,5-50%	M6	3400	58	768	A
G65 288x592x635, 4p	288	592	635	4	ePM2,5-50%	M6	1700	58	768	
G65 490x592x635, 6p	490	592	635	6	ePM2,5-50%	M6	2800	58	768	
G65 592x592x635, 10p	592	592	635	10	ePM2,5-50%	M6	3400	60	772	A
G65 288x592x635, 5p	288	592	635	5	ePM2,5-50%	M6	1700	60	772	
G65 490x592x635, 8p	490	592	635	8	ePM2,5-50%	M6	2800	60	772	
G65 592x592x635, 12p	592	592	635	12	ePM2,5-50%	M6	3400	60	756	A
G65 288x592x635, 6p	288	592	635	6	ePM2,5-50%	M6	1700	60	756	
G65 490x592x635, 10p	490	592	635	10	ePM2,5-50%	M6	2800	60	756	

Custom sizes available on request.