

G65

Bag filters with fiberglass medium,
filter class ISO ePM2.5-50%

APPLICATIONS


- Medium filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- The aerodynamic design reduces turbulence in the airflow
- Tapered stitched bags reduce pressure drop
- Low energy consumption
- High dust-holding capacity
- Long lifespan
- Eurovent certified via the manufacturer Deltrian

SPECIFICATIONS

- Medium: Fiberglass
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Max. continuous temperature: 70°C
- Max. relative humidity: 100%

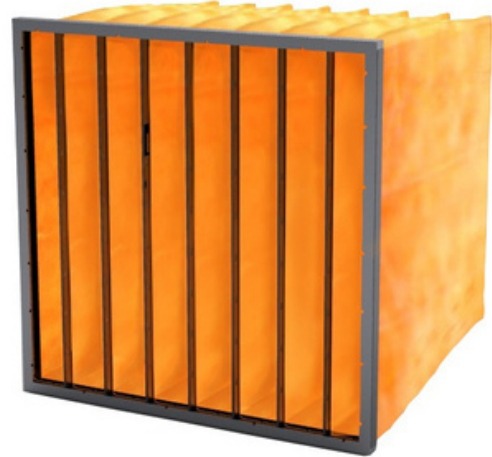

ITEM NO.	DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	CLASS ISO 16890	CLASS EN779:2012 M3/U	AIRFLOW	ΔP INITIAL	KWH/J 4/21-2018
02020	G65 592x592x360, 6p	592	592	360	6	ePM2,5-50%	M6	3400	100	
02021	G65 288x592x360, 3p	288	592	360	3	ePM2,5-50%	M6	1700	100	
02022	G65 490x592x360, 5p	490	592	360	5	ePM2,5-50%	M6	2800	100	
02023	G65 288x288x360, 3p	288	288	360	3	ePM2,5-50%	M6	850	100	
02025	G65 592x288x360, 6p	592	288	360	6	ePM2,5-50%	M6	1700	100	
02026	G65 592x490x360, 6p	592	490	360	6	ePM2,5-50%	M6	2800	100	
02074	G65 592x892x360, 6p	592	892	360	6	ePM2,5-50%	M6	5100	100	
02092	G65 288x892x360, 3p	288	892	360	3	ePM2,5-50%	M6	2550	100	
02075	G65 490x892x360, 5p	490	892	360	5	ePM2,5-50%	M6	4200	100	
02012	G65 592x592x600, 8p	592	592	600	8	ePM2,5-50%	M6	3400	58	768
02013	G65 288x592x600, 4p	288	592	600	4	ePM2,5-50%	M6	1700	58	768
02014	G65 490x592x600, 6p	490	592	600	6	ePM2,5-50%	M6	2800	58	768
02024	G65 288x288x600, 4p	288	288	600	4	ePM2,5-50%	M6	850	58	768
02035	G65 592x288x600, 8p	592	288	600	8	ePM2,5-50%	M6	1700	58	768
02034	G65 592x490x600, 8p	592	490	600	8	ePM2,5-50%	M6	2800	58	768
02061	G65 592x892x600, 8p	592	892	600	8	ePM2,5-50%	M6	5100	58	768
02062	G65 288x892x600, 4p	288	892	600	4	ePM2,5-50%	M6	2550	58	768
02063	G65 490x892x600, 6p	490	892	600	6	ePM2,5-50%	M6	4200	58	768

Custom sizes available on request.