

G85

Bag filters with glass fiber medium,
filter class ePM1-70%

APPLICATIONS



- Fine filtration for air handling units and prefiltration for (H)EPA filters

BENEFITS

- The aerodynamic shape reduces turbulence in the airflow
- Tapered pockets reduce pressure drop
- Low energy consumption
- High dust holding capacity
- Long lifespan
- Eurovent certified through the manufacturer Deltrian

SPECIFICATIONS

- Medium: Glass fiber
- Frame: Steel, also available in wood and plastic
- Recommended termination resistance: 250Pa
- Max. continuous temperature: 70 gr. Celsius
- Max. relative humidity: 100%

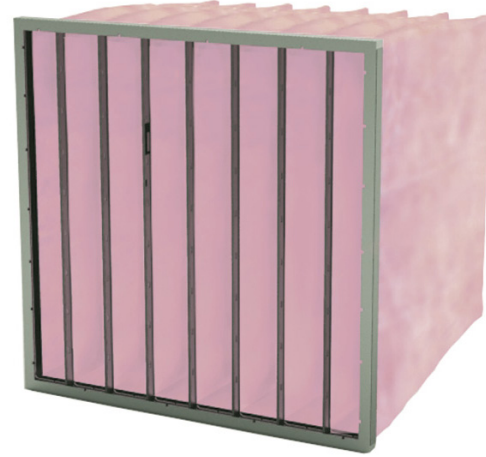

ARTIKLENR.	DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	POCKETS	CLASS ISO 16890	CLASS EN779:2012	FLOW M ³ /U	ΔP START	KWH/J 4/21-2018
02145	G85 592x592x360, 8p	592	592	360	8	ePM1-70%	F7	3400	140	
02161	G85 288x592x360, 4p	288	592	360	4	ePM1-70%	F7	1700	140	
02117	G85 490x592x360, 6p	490	592	360	6	ePM1-70%	F7	2800	140	
02122	G85 288x288x360, 4p	288	288	360	4	ePM1-70%	F7	850	140	
02155	G85 592x288x360, 8p	592	288	360	8	ePM1-70%	F7	1700	140	
02137	G85 592x490x360, 8p	592	490	360	8	ePM1-70%	F7	2800	140	
02144	G85 592x892x360, 8p	592	892	360	8	ePM1-70%	F7	5100	140	
02173	G85 288x892x360, 4p	288	892	360	4	ePM1-70%	F7	2550	140	
02181	G85 490x892x360, 6p	490	892	360	6	ePM1-70%	F7	4200	140	
02110	G85 592x592x600, 8p	592	592	600	8	ePM1-70%	F7	3400	98	1239
02111	G85 288x592x600, 4p	288	592	600	4	ePM1-70%	F7	1700	98	1239
02112	G85 490x592x600, 6p	490	592	600	6	ePM1-70%	F7	2800	98	1239
02118	G85 288x288x600, 4p	288	288	600	4	ePM1-70%	F7	850	98	1239
02120	G85 592x288x600, 8p	592	288	600	8	ePM1-70%	F7	1700	98	1239
02119	G85 592x490x600, 8p	592	490	600	8	ePM1-70%	F7	2800	98	1239
02149	G85 592x892x600, 8p	592	892	600	8	ePM1-70%	F7	5100	98	1239
02150	G85 288x892x600, 4p	288	892	600	4	ePM1-70%	F7	2550	98	1239
02151	G85 490x892x600, 6p	490	892	600	6	ePM1-70%	F7	4200	98	1239

Different sizes on request