

IMA MELTBLOWN ABSOLUTE CANDLES

Feature: High dirt load

APPLICATIONS

- Pharmaceutical: filtration of extracts, protection of membrane filters.
- Electronics: pure water, distilled water, reverse osmosis (pre-filtration).
- Food: mineral water, beer, wine, fruit juice, milk and natural oils.
- Cosmetic: mouthwash, perfume, lotion and shampoo.
- Other: chemicals, paper coatings, ink, solvents, resins, lacquers and reuse of condensate.

FEATURE


- 100% polypropylene high quality FDA and EC approved, no addition of glue, no loose fibers, open pore structure and a high dirt load.

EXTRA

- Versions with an inner core are available on request.



LENGTH TYPE	SIZE	MICRON SIZE			CODE EINDKAP/ADAPTER						
		1	5	10	PP	OS	VOS	OBS	VOBS	OP	VOP
10	10"	√	√	√	√	√	√	√	√	√	√
20	20"	√	√	√	√	√	√	√	√	√	√
30	30"	√	√	√	√	√	√	√	√	√	√
40"	40"	√	√	√	√	√	√	√	√	√	√

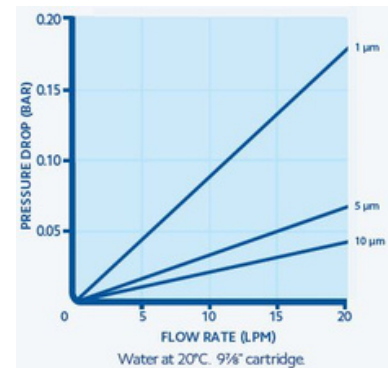

Length in inches**	: 10, 20, 30 and 40.
Length in mm**	: 250, 508, 762 and 1016.
Micron size absolute	: 1, 5, 10. Different micron sizes on request. :
Outer diameter Inner	64mm
diameter End cap	: 27 mm : PP, OS, VOC, OBS, VOBS, OP and
Max. operating temp.	VOP* : 65 °C (higher temperature with inner
Max. pressure	core) : 2 bar / 20 °C
difference	

EXAMPLE OF PRODUCT CODE

IMA-20-0.5-OS

Length	: 20"
Fineness	: 0.5 micron
End cap	: O-rings (spear)



* PP - flat polypropylene gasket, OS - o-rings (spear), VOS - Viton o-rings (spear), OBS - o-rings (bayonet/spear), VOBS - Viton o-rings (bayonet/spear), OP - o-rings (flat), VOP - Viton o-rings (flat)

**Different lengths on request.