

IM MELTBLOWN INDUSTRIAL CANDLES

Feature: High dirt load

APPLICATIONS

- Water treatment, pre-filtration for pure water, fine chemicals, natural oils, solvents, reverse osmosis, wine (pre-filtration), soft drinks, cosmetics, electroplating baths and greases.

FEATURE


- Medium: High-quality meltblown polypropylene micro fibers, thermally bonded for prevention of fiber migration and FDA and EC approved.
- Depth filtration, high dirt load capacity.

EXTRA

- Versions with an inner core are possible on request.



LENGTH TYPE SIZE	MICRON SIZE	CODE ENDCAP/ADAPTER																		
		0.5	1	3	5	10	20	30	50	75	100	150	PP	OS	VOS	OBS	VOBS	OP	VOP	
9	9 3/4"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
10	10"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
19	19 1/2"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
20	20"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
29	29 1/4"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
30"	30"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
40"	40"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
50"	50"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

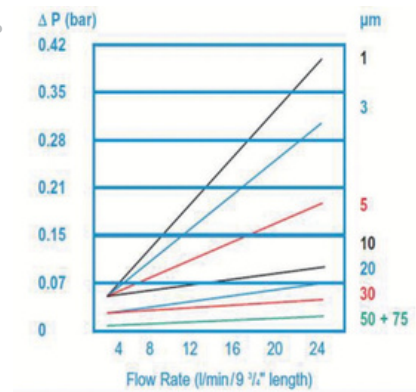

Length in inches**	: 9 3/4, 10, 19 1/2, 20, 29 1/4, 30, 40 and 50
Length in mm**	: 248, 254, 496, 508, 744, 762, 1016 and 1270 :
Micron size	: 0.5, 1, 5, 10, 15, 20, 25, 30, 50, 75, 100, 150
Outer diameter	: 64 mm
Inner diameter	: 27 mm
End cap	: PP, OS, VOC, OBS, VOBS, OP and VOP*
Max. operating temp.	: 55 - 80 °C (higher temperature with inner core)
Max. pressure difference	: 2.5 bar / 20 °C

* PP - flat polypropylene gasket, OS - o-rings (spear), VOS - Viton o-rings (spear), OBS - o-rings (bayonet/spear), VOBS - Viton o-rings (bayonet/spear), OP - o-rings (flat), VOP - Viton o-rings (flat)

**Different lengths on request

PRODUCT CODE EXAMPLE

IM-30-75
 Length : 30"
 Fineness : 75 microns

