

INTERPLEAT GT

Feature: Panel filters with pleats

APPLICATIONS


- Pre-filtration for filtration systems

BENEFITS

- Large filter surface for extended service life
- High dust holding capacity
- Easy to install and replace panel filter
- Filter media supported on both sides by mesh
- Flame-retardant media class M1 available upon request
- Non-standard sizes available.

SPECIFICATIONS

- Filter class: According to ISO16890
- Media: Polyester pleated and bonded to mesh
- Frame: Galvanized steel
- Recommended final resistance: 250 Pa
- Max. continuous temperature: 70°C
- Max. relative humidity: 100%

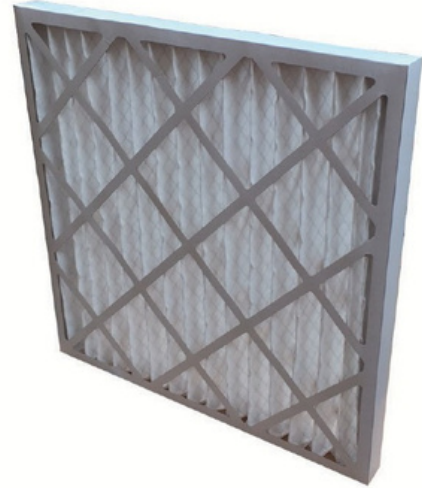

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	DEPTH (C) MM	CLASS ISO 16890	CLASS EN779:2012	CAPACITY M3/U	INITIAL RESISTANCE
Interpleat 24x24x2	592	592	8	Coarse 85%	G4	3250	50 pa
Interpleat 12x24x2	288	592	48	Coarse 85%	G4	1600	50 pa
Interpleat 24x24x4	592	592	95	Coarse 85%	G4	4250	50 pa
Interpleat 12x24x4	288	592	95	Coarse 85%	G4	2100	50 pa
Interpleat 24x24x2	592	592	48	Coarse 95%	M5	3400	70 pa
Interpleat 12x24x2	288	592	48	Coarse 95%	M5	1623	70 pa
Interpleat 24x24x4	592	592	95	Coarse 95%	M5	3400	50 pa
Interpleat 12x24x4	288	592	95	Coarse 95%	M5	1623	50 pa

Custom sizes and filterclass on request.