

INTERPLEAT M5

Flat filters with pleated filter media and cardboard frame, filter class ISO Coarse-95%

APPLICATIONS


- Coarse (pre)filtration in air handling units or air intake grilles

BENEFITS

- Sturdy panel filter with pleated media
- Easy to install and replace
- Long service life
- Water-repellent cardboard frame
- Media supported at the rear

SPECIFICATIONS

- Media: Synthetic, pleated and bonded to mesh
- Frame: Water-repellent cardboard
- Recommended final resistance: 250 Pa
- Max. continuous temperature: 80°C
- Max. relative humidity: 100%

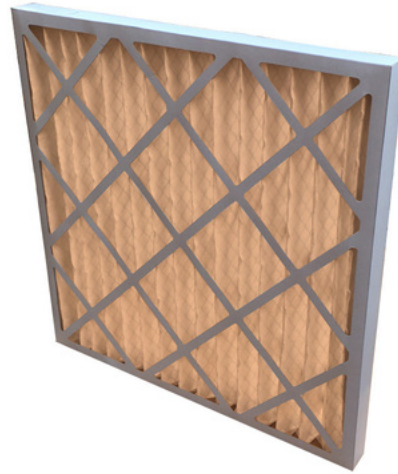

ARTICLE NO.	DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	DEPTH (C) MM	CLASS ISO 16890	CLASS EN779:2012	FLOW RATE M3/U	ΔP INITIAL
05056	Interpleat M5 16x20x1	395	495	23	Coarse-95%	M5	1053	75
05236	Interpleat M5 20x20x1	495	495	23	Coarse-95%	M5	1323	75
100622	Interpleat M5 20x25x1	495	622	23	Coarse-95%	M5	1663	75
100623	Interpleat M5 16x25x1	395	622	23	Coarse-95%	M5	1323	75
05714	Interpleat M5 24x24x1	594	594	23	Coarse-95%	M5	1905	75
05713	Interpleat M5 12x24x1	288	594	23	Coarse-95%	M5	937	75
04508	Interpleat M5 16x20x2	395	495	45	Coarse-95%	M5	1825	70
01319	Interpleat M5 20x20x2	495	495	45	Coarse-95%	M5	2882	70
03034	Interpleat M5 20x25x2	495	622	45	Coarse-95%	M5	2217	70
01653	Interpleat M5 16x25x2	395	622	45	Coarse-95%	M5	1854	70
01693	Interpleat M5 24x24x2	594	594	45	Coarse-95%	M5	3400	70
01518	Interpleat M5 12x24x2	288	594	45	Coarse-95%	M5	1623	70
03822	Interpleat M5 24x24x4	594	594	96	Coarse-95%	M5	3400	50
03821	Interpleat M5 12x24x4	288	594	96	Coarse-95%	M5	1623	50
04408	Interpleat M5 20x20x4	495	495	96	Coarse-95%	M5	2293	50
100629	Interpleat M5 16x20x4	391	495	96	Coarse-95%	M5	1825	50
100630	Interpleat M5 16x25x4	391	622	96	Coarse-95%	M5	2294	50
05838	Interpleat M5 20x25x4	492	622	96	Coarse-95%	M5	2282	50

Custom sizes on request.