

# KS65

Pocket filters with synthetic filter medium,  
filter class ISO ePM10-70%

## APPLICATIONS


- Coarse (pre)filtration for air handling units and air inlet grilles
- Filtration of return and recirculation air

## ADVANTAGES

- High dust holding capacity
- Low pressure drop across the filter
- Conical bags
- Applicable within food processing companies
- Eurovent certified through the manufacturer Deltrian

## CHARACTERISTICS

- Medium: Synthetic with progressive construction
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250Pa
- Max. continuous temperature: 70 °C
- Max. relative humidity: 100%

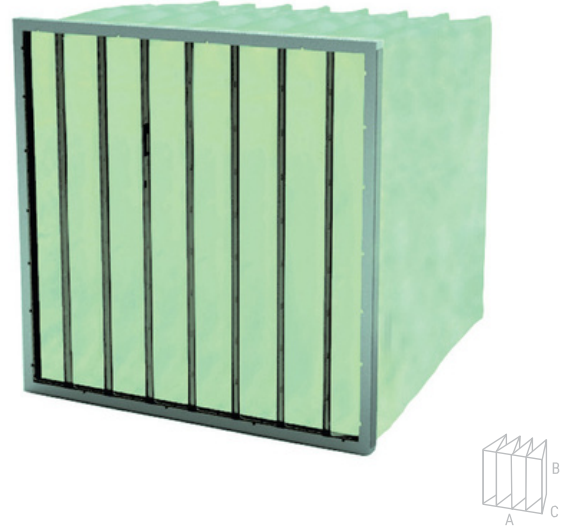

ITEM NO.	DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF BAGS	CLASS ISO 16890	CLASS EN779:2012	FLOW RATE M3/H	ΔP INITIAL	KWH/A 4/21-2018
02401	<b>KS65 592x592x360, 6p</b>	592	592	360	6	ePM10-70%	M6	3400	72	
02402	<b>KS65 288x592x360, 3p</b>	288	592	360	3	ePM10-70%	M6	1700	72	
02403	<b>KS65 490x592x360, 5p</b>	490	592	360	5	ePM10-70%	M6	2800	72	
02406	<b>KS65 288x288x360, 3p</b>	288	288	360	3	ePM10-70%	M6	850	72	
02404	<b>KS65 592x288x360, 6p</b>	592	288	360	6	ePM10-70%	M6	1700	72	
02405	<b>KS65 592x490x360, 6p</b>	592	490	360	6	ePM10-70%	M6	2800	72	
02408	<b>KS65 592x892x360, 8p</b>	592	892	360	8	ePM10-70%	M6	5100	72	
02409	<b>KS65 288x892x360, 4p</b>	288	892	360	4	ePM10-70%	M6	2550	72	
02410	<b>KS65 490x892x360, 6p</b>	490	892	360	6	ePM10-70%	M6	4250	72	
02431	<b>KS65 592x592x600, 8p</b>	592	592	600	8	ePM10-70%	M6	3400	50	>1300
02432	<b>KS65 288x592x600, 4p</b>	288	592	600	4	ePM10-70%	M6	1700	50	>1300
02433	<b>KS65 490x592x600, 6p</b>	490	592	600	6	ePM10-70%	M6	2800	50	>1300
02416	<b>KS65 288x288x600, 4p</b>	288	288	600	4	ePM10-70%	M6	850	50	>1300
02434	<b>KS65 592x288x600, 8p</b>	592	288	600	8	ePM10-70%	M6	1700	50	>1300
02435	<b>KS65 592x490x600, 8p</b>	592	490	600	8	ePM10-70%	M6	2800	50	>1300
02446	<b>KS65 592x892x600, 8p</b>	592	892	600	8	ePM10-70%	M6	5100	50	>1300
02447	<b>KS65 288x892x600, 4p</b>	288	892	600	4	ePM10-70%	M6	2550	50	>1300
02445	<b>KS65 490x892x600, 6p</b>	490	892	600	6	ePM10-70%	M6	4250	50	>1300

*Different sizes on request*