

# KS85

Bagfilter with synthetic filter media,  
filter class ISO ePM2,5-70%

## APPLICATION


- Fine filtration for air handling units and pre-filtration for (H)EPA filters.

## BENEFITS

- High dust holding capacity
- Low pressure drop across the filter
- Conical bags
- Applicable within food processing companies
- Eurovent certified through the manufacturer Deltrian

## PROPERTIES

- Medium: Synthetic with progressive construction
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250Pa
- Max. continuous temperature: 70 degrees Celsius
- Max. relative humidity: 100%

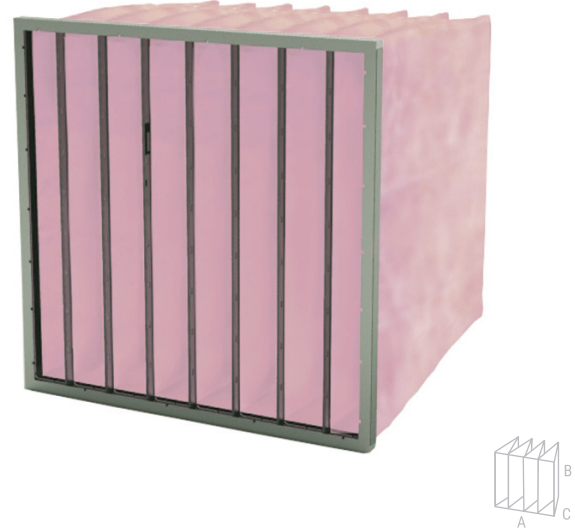

ARTICLENR.	DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NR. OF POCKETS	CLASS ISO 16890	CLASS EN779:2012	FLOW M <sup>3</sup> /U	ΔP RESISTANCE	KWH/J 4/21-2018
02546	<b>KS85 592x592x360, 8p</b>	592	592	360	8	ePM2,5-70%	F7	3400	120	
02547	<b>KS85 288x592x360, 4p</b>	288	592	360	4	ePM2,5-70%	F7	1700	120	
02549	<b>KS85 490x592x360, 6p</b>	490	592	360	6	ePM2,5-70%	F7	2800	120	
02506	<b>KS85 288x288x360, 4p</b>	288	288	360	4	ePM2,5-70%	F7	850	120	
02548	<b>KS85 592x288x360, 8p</b>	592	288	360	8	ePM2,5-70%	F7	1700	120	
02545	<b>KS85 592x490x360, 8p</b>	592	490	360	8	ePM2,5-70%	F7	2800	120	
02527	<b>KS85 592x892x360, 8p</b>	592	892	360	8	ePM2,5-70%	F7	5100	120	
02705	<b>KS85 288x892x360, 4p</b>	288	892	360	4	ePM2,5-70%	F7	2250	120	
02703	<b>KS85 490x892x360, 6p</b>	490	892	360	6	ePM2,5-70%	F7	4200	120	
02531	<b>KS85 592x592x600, 8p</b>	592	592	600	8	ePM2,5-70%	F7	3400	103	>2000
02532	<b>KS85 288x592x600, 4p</b>	288	592	600	4	ePM2,5-70%	F7	1700	103	>2000
02533	<b>KS85 490x592x600, 6p</b>	490	592	600	6	ePM2,5-70%	F7	2800	103	>2000
02537	<b>KS85 288x288x600, 4p</b>	288	288	600	4	ePM2,5-70%	F7	850	103	>2000
02534	<b>KS85 592x288x600, 8p</b>	592	288	600	8	ePM2,5-70%	F7	1700	103	>2000
02535	<b>KS85 592x490x600, 8p</b>	592	490	600	8	ePM2,5-70%	F7	2800	103	>2000
02661	<b>KS85 592x892x600, 8p</b>	592	892	600	8	ePM2,5-70%	F7	5100	103	>2000
02662	<b>KS85 288x892x600, 4p</b>	288	892	600	4	ePM2,5-70%	F7	2550	103	>2000
02663	<b>KS85 490x892x600, 6p</b>	490	892	600	6	ePM2,5-70%	F7	4200	103	>2000

Custom sizes available upon request