

KS95

Pocket filters with multi-layer synthetic filter medium, filter class ISO ePM1-70%



APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- High dust holding capacity
- Low pressure drop across the filter
- Conical bags
- Applicable within food companies
- Eurovent certified

SPECIFICATIONS

- Medium: Synthetic with progressive build
- Frame: Steel, also available in wood, plastic or reusable LFC frame
- Recommended final resistance: 250Pa
- Max. continuous temperature: 70 °C
- Max. relative humidity: 100%

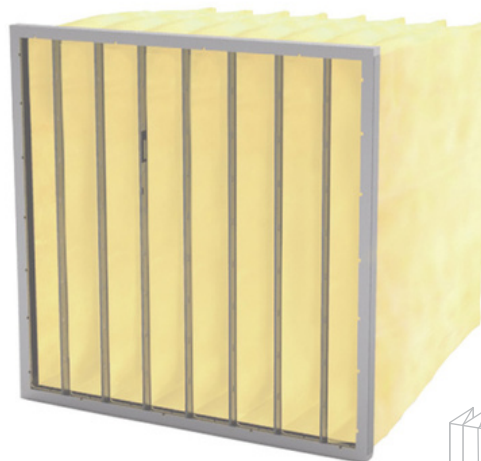

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN 779:2012	FLOW RATE m³/U	ΔP INITIAL	KWH/J 4/21-2018	ENERGY CLASS
KS95 592x592x500, 8p	592	592	500	8	ePM1-70%	F8	2000	106	>2150	E
KS95 288x592x500, 4p	288	592	500	4	ePM1-70%	F8	1000	106	>2150	
KS95 490x592x500, 6p	490	592	500	6	ePM1-70%	F8	1650	106	>2150	
KS95 288x288x500, 4p	288	288	500	4	ePM1-70%	F8	500	106	>2150	
KS95 592x592x600, 8p	592	592	600	8	ePM1-70%	F8	2000	86	>2150	E
KS95 288x592x600, 4p	288	592	600	4	ePM1-70%	F8	1000	86	>2150	
KS95 490x592x600, 6p	490	592	600	6	ePM1-70%	F8	1650	86	>2150	
KS95 288x288x600, 4p	288	288	600	4	ePM1-70%	F8	500	86	>2150	

Different sizes on request