

KS95

Pocket filter with multi-layer synthetic filter media, filter class ISO ePM1-70%

APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

ADVANTAGES

- High dust holding capacity
- Low pressure drop across the filter
- Conical bags
- Applicable within food companies
- Eurovent certified via the manufacturer Deltrian

CHARACTERISTICS

- Medium: Synthetic with progressive build
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250Pa
- Max. continuous temperature: 70 °C
- Max. relative humidity: 100%

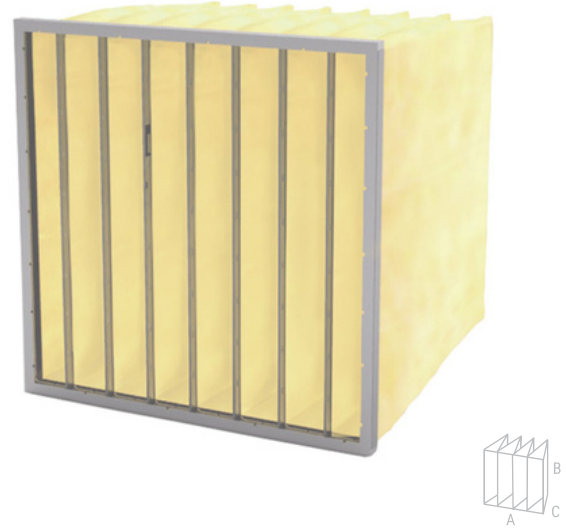

ITEM NO.	DESCRIPTION	WIDTH (A) MM	HEIGHT (W) MM	LENGTH (C) MM	NUMBER OF POCKETS	CLASS ISO 16890	CLASS EN779:2012	FLOW RATE M3/H	ΔP INITIAL
02631	KS95 592x592x600, 8p	592	592	600	8	ePM1-70%	F8	2000	86
02632	KS95 288x592x600, 4p	288	592	600	4	ePM1-70%	F8	1000	86
02633	KS95 490x592x600, 6p	490	592	600	6	ePM1-70%	F8	1665	86
02637	KS95 288x288x600, 4p	288	288	600	4	ePM1-70%	F8	500	86
02634	KS95 592x288x600, 8p	592	288	600	8	ePM1-70%	F8	1000	86
02635	KS95 592x490x600, 8p	592	490	600	8	ePM1-70%	F8	1665	86
02607	KS95 592x892x600, 8p	592	892	600	8	ePM1-70%	F8	3000	86
02608	KS95 288x892x600, 3p	288	892	600	3	ePM1-70%	F8	1500	86
02615	KS95 490x892x600, 5p	490	892	600	5	ePM1-70%	F8	2470	86

Different sizes on request