

KS85

Pocket filters with synthetic filter medium,
filter class ISO ePM2,5-70%



APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- High dust holding capacity
- Low pressure drop across the filter
- Conical bags
- Suitable for use in food industry companies
- Eurovent certified

SPECIFICATIONS

- Medium: Synthetic with progressive construction
- Frame: Steel, also available in wood, plastic or a reusable LFC frame
- Recommended final resistance: 250Pa
- Max. continuous temperature: 70°C
- Max. relative humidity: 100%

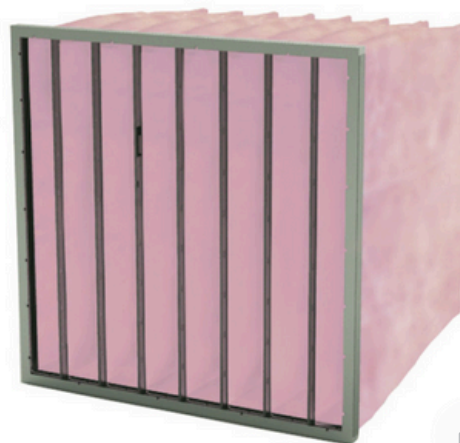

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN 779:2012	FLOW RATE m³/U	ΔP INITIAL	KWH/J 4/21-2018	ENERGY CLASS
KS85 592x592x500, 8p	592	592	500	8	ePM2,5-70%	F7	3400	115	>2000	E
KS85 288x592x500, 4p	288	592	500	4	ePM2,5-70%	F7	1700	115	>2000	
KS85 490x592x500, 6p	490	592	500	6	ePM2,5-70%	F7	2800	115	>2000	
KS85 288x288x500, 4p	288	288	500	4	ePM2,5-70%	F7	850	115	>2000	
KS85 592x592x600, 8p	592	592	600	8	ePM2,5-70%	F7	3400	103	>2000	E
KS85 288x592x600, 4p	288	592	600	4	ePM2,5-70%	F7	1700	103	>2000	
KS85 490x592x600, 6p	490	592	600	6	ePM2,5-70%	F7	2800	103	>2000	
KS85 288x288x600, 4p	288	288	600	4	ePM2,5-70%	F7	850	103	>2000	

Different sizes available on request