

NW80

Bag filter with Nanowave synthetic filter medium,
filter class ISO ePM1-60%



APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- Very low initial resistance
- High dust-holding capacity, long service life
- Low energy consumption
- Self-supporting medium
- Eurovent certified

SPECIFICATIONS

- Medium: Nanowave synthetic
- Frame: Steel, also available in wood, plastic or a reusable LFC frame
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 80°C
- Maximum relative humidity: 100%

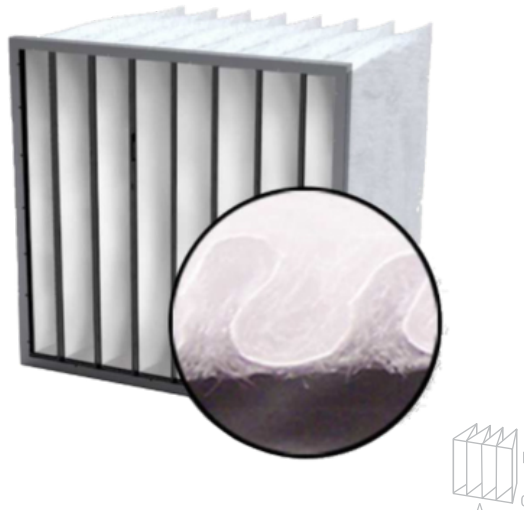

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN 779:2012	FLOW RATE m³/U	ΔP INITIAL	KWH/J 4/21-2018	ENERGY CLASS
NW80 592x592x360, 6p	592	592	360	6	ePM1-60%	F7	3400	182	>2050	E
NW80 288x592x360, 3p	288	592	360	3	ePM1-60%	F7	1700	182	>2050	
NW80 490x592x360, 5p	490	592	360	5	ePM1-60%	F7	2800	182	>2050	
NW80 592x592x360, 8p	592	592	360	8	ePM1-60%	F7	3400	162	>2050	E
NW80 288x592x360, 4p	288	592	360	4	ePM1-60%	F7	1700	162	>2050	
NW80 490x592x360, 6p	490	592	360	6	ePM1-60%	F7	2800	162	>2050	
NW80 592x592x360, 10p	592	592	360	10	ePM1-60%	F7	3400	133	>2050	E
NW80 288x592x360, 5p	288	592	360	5	ePM1-60%	F7	1700	133	>2050	
NW80 490x592x360, 8p	490	592	360	8	ePM1-60%	F7	2800	133	>2050	
NW80 592x592x535, 10p	592	592	535	10	ePM1-60%	F7	3400	100	1396	C
NW80 288x592x535, 5p	288	592	535	5	ePM1-60%	F7	1700	100	1396	
NW80 490x592x535, 8p	490	592	535	8	ePM1-60%	F7	2800	100	1396	
NW80 592x592x635, 8p	592	592	635	8	ePM1-60%	F7	3400	92	1295	C
NW80 288x592x635, 4p	288	592	635	4	ePM1-60%	F7	1700	92	1295	
NW80 490x592x635, 6p	490	592	635	6	ePM1-60%	F7	2800	92	1295	
NW80 592x592x635, 10p	592	592	635	10	ePM1-60%	F7	3400	80	1047	B
NW80 288x592x635, 5p	288	592	635	5	ePM1-60%	F7	1700	80	1047	
NW80 490x592x635, 8p	490	592	635	8	ePM1-60%	F7	2800	80	1047	

Custom sizes available on request