

NW85

Bag filter with nanowave synthetic filter medium,
filter class ISO ePM1-60%



APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- Very low initial resistance
- High dust-holding capacity, long service life
- Low energy consumption
- Self-supporting medium
- Eurovent certified

SPECIFICATIONS

- Medium: Nanowave synthetic
- Frame: Steel, also available in wood, plastic and a reusable LFC frame
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 80°C
- Maximum relative humidity: 100%

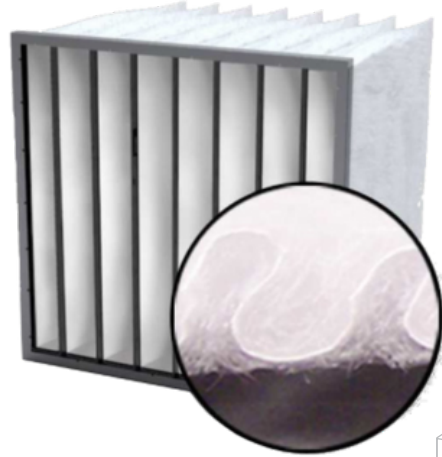

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN779:2012	FLOW RATE m³/U	ΔP INITIAL	KWH/J 4/21-2018	ENERGY CLASS
NW85 592x592x535, 8p	592	592	535	8	ePM1-60%	F7	3400	85	1254	C
NW85 288x592x535, 4p	288	592	535	4	ePM1-60%	F7	1700	85	1254	
NW85 490x592x535, 6p	490	592	535	6	ePM1-60%	F7	2800	85	1254	
NW85 592x592x635, 10p	592	592	635	10	ePM1-60%	F7	3400	74	1162	C
NW85 288x592x635, 5p	288	592	635	5	ePM1-60%	F7	1700	74	1162	
NW85 490x592x635, 8p	490	592	635	8	ePM1-60%	F7	2800	74	1162	
NW85 592x592x635, 8p	592	592	635	8	ePM1-60%	F7	3400	74	950	A
NW85 288x592x635, 4p	288	592	635	4	ePM1-60%	F7	1700	74	950	
NW85 490x592x635, 6p	490	592	635	6	ePM1-60%	F7	2800	74	950	
NW85 592x592x635, 10p	592	592	635	10	ePM1-60%	F7	3400	74	897	A
NW85 288x592x635, 5p	288	592	635	5	ePM1-60%	F7	1700	74	897	
NW85 490x592x635, 8p	490	592	635	8	ePM1-60%	F7	2800	74	897	

Custom sizes available on request.