

NW85

Bag filter with Nanowave synthetic filter medium, filter class ISO ePM1-60%

APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- Very low initial resistance
- High dust-holding capacity, long service life
- Low energy consumption
- Self-supporting medium
- Eurovent certified through the manufacturer Deltrian

SPECIFICATIONS

- Medium: Nanowave synthetic
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70°C
- Maximum relative humidity: 100%

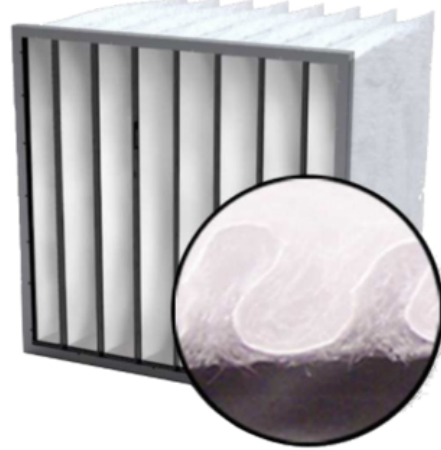

ARTICLE NO.	DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	CLASS ISO 16890	CLASS EN779:2012	FLOW RATE M3/U	ΔP INITIAL	KWH/J 4/21-2018
18753	NW85 592x592x500, 8p	592	592	500	8	ePM1-60%	F7	3400	85	1254
18760	NW85 288x592x500, 4p	288	592	500	4	ePM1-60%	F7	1700	85	1254
18793	NW85 490x592x500, 6p	490	592	500	6	ePM1-60%	F7	2800	85	1254
18792	NW85 288x288x500, 4p	288	288	500	4	ePM1-60%	F7	850	85	1254
18747	NW85 592x288x500, 8p	592	288	500	8	ePM1-60%	F7	1700	85	1254
18765	NW85 592x490x500, 8p	592	490	500	8	ePM1-60%	F7	2800	85	1254
18710	NW85 592x592x600, 8p	592	592	600	8	ePM1-60%	F7	3400	74	950
18711	NW85 288x592x600, 4p	288	592	600	4	ePM1-60%	F7	1700	74	950
18712	NW85 490x592x600, 6p	490	592	600	6	ePM1-60%	F7	2800	74	950
18718	NW85 288x288x600, 4p	288	288	600	4	ePM1-60%	F7	850	74	950
18720	NW85 592x288x600, 8p	592	288	600	8	ePM1-60%	F7	1700	74	950
18719	NW85 592x490x600, 8p	592	490	600	8	ePM1-60%	F7	2800	74	950
18784	NW85 592x592x600, 10p	592	592	600	10	ePM1-60%	F7	3400	74	897
18798	NW85 288x592x600, 5p	288	592	600	5	ePM1-60%	F7	1700	74	897
189771	NW85 490x592x600, 8p	490	592	600	8	ePM1-60%	F7	2800	74	897
18186	NW85 288x288x600, 5p	288	288	600	5	ePM1-60%	F7	850	74	897
18189	NW85 592x288x600, 10p	592	288	600	10	ePM1-60%	F7	1700	74	897
	NW85 592x490x600, 10p	592	490	600	10	ePM1-60%	F7	2800	74	897