

NW95

Bag filter with Nanowave synthetic filter medium, filter class ISO ePM1-70%

APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- Very low initial resistance
- High dust-holding capacity, long service life
- Low energy consumption
- Self-supporting medium
- Eurovent certified through the manufacturer Deltrian

SPECIFICATIONS

- Medium: Nanowave synthetic
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70°C
- Maximum relative humidity: 100%

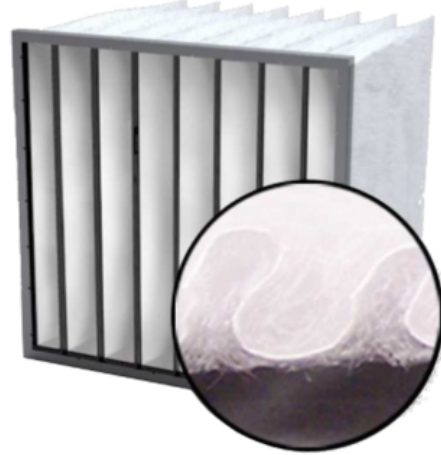

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	CLASS ISO 16890	CLASS EN779:2012	FLOW RATE M3/U	ΔP INITIAL
NW95 592x592x360, 8p	592	592	360	8	ePM1-70%	F8	3400	150
NW95 288x592x360, 4p	288	592	360	4	ePM1-70%	F8	1700	150
NW95 490x592x360, 6p	490	592	360	6	ePM1-70%	F8	2800	150
NW95 288x288x360, 4p	288	288	360	4	ePM1-70%	F8	850	150
NW95 592x288x360, 8p	592	288	360	8	ePM1-70%	F8	1700	150
NW95 592x490x360, 8p	592	490	360	8	ePM1-70%	F8	2800	150