

NW95

Bag filter with nanowave synthetic filter medium,
filter coarse ISO ePM1-70%



APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- Very low initial resistance
- High dust holding capacity, long service life
- Low energy consumption
- Self-supporting medium
- Eurovent certified

SPECIFICATIONS

- Medium: Nanowave synthetic
- Frame: Steel, also available in wood, plastic or re-usable LFC frame
- Recommended final pressure drop: 250Pa
- Max. continuous temperature: 80°C
- Max. relative humidity: 100%

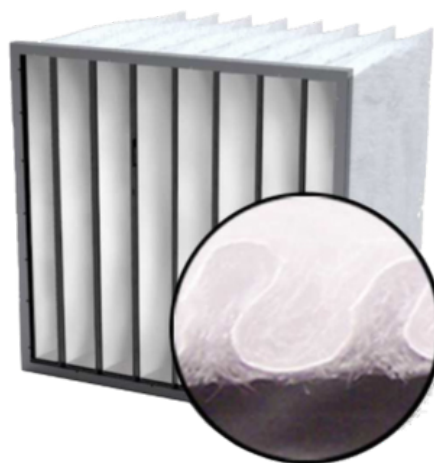

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN 779:2012	FLOW RATE m³/U	ΔP INITIAL	KWH/J 4/21-2018	ENERGY CLASS
NW95 592x592x360, 6p	592	592	360	6	ePM1-70%	F7	3400	194	>2150	E
NW95 288x592x360, 3p	288	592	360	3	ePM1-70%	F7	1700	194	>2150	
NW95 490x592x360, 5p	490	592	360	5	ePM1-70%	F7	2800	194	>2150	
NW95 592x592x360, 8p	592	592	360	8	ePM1-70%	F7	3400	150	2196	E
NW95 288x592x360, 4p	288	592	360	4	ePM1-70%	F7	1700	150	2196	
NW95 490x592x360, 6p	490	592	360	6	ePM1-70%	F7	2800	150	2196	
NW95 592x592x360, 10p	592	592	360	10	ePM1-70%	F7	3400	125	1739	D
NW95 288x592x360, 5p	288	592	360	5	ePM1-70%	F7	1700	125	1739	
NW95 490x592x360, 8p	490	592	360	8	ePM1-70%	F7	2800	125	1739	
NW95 592x592x535, 10p	592	592	535	10	ePM1-70%	F8	3400	81	1056	A
NW95 288x592x535, 5p	288	592	535	5	ePM1-70%	F8	1700	81	1056	
NW95 490x592x535, 8p	490	592	535	8	ePM1-70%	F8	2800	81	1056	
NW95 592x592x635, 8p	592	592	635	8	ePM1-70%	F8	3400	81	1067	A
NW95 288x592x635, 4p	288	592	635	4	ePM1-70%	F8	1700	81	1067	
NW95 490x592x635, 6p	490	592	635	6	ePM1-70%	F8	2800	81	1067	
NW95 592x592x635, 10p	592	592	635	10	ePM1-70%	F8	3400	74	936	A+
NW95 288x592x635, 5p	288	592	635	5	ePM1-70%	F8	1700	74	936	
NW95 490x592x635, 8p	490	592	635	8	ePM1-70%	F8	2800	74	936	

Custom sizes available on request