

NW95

Bag filter with nanowave synthetic filter medium, filter coarse ISO ePM1-70%

APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

ADVANTAGES

- Very low initial resistance
- High dust holding capacity, long service life
- Low energy consumption
- Self-supporting medium
- Eurotest certified through the manufacturer Deltrian

CHARACTERISTICS

- Medium: Nanowave synthetic
- Frame: Steel, also available in wood and plastic
- Recommended final pressure drop: 250Pa
- Max. continuous temperature: 70°C
- Max. relative humidity: 100%

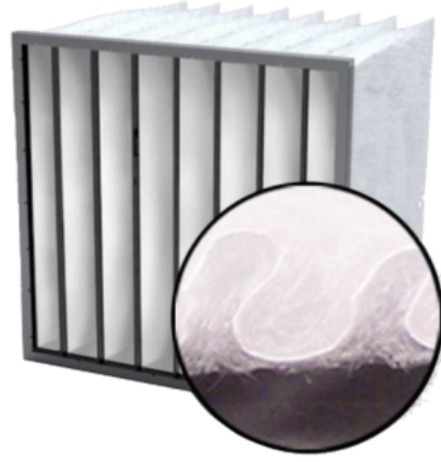

ITEM NO.	DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN 779:2012	FLOW RATE M3/U	ΔP INITIAL	KWH/J 4/21-2018
18893	NW95 592x592x500, 10p	592	592	500	10	ePM1-70%	F8	3400	81	1056
18898	NW95 288x592x500, 5p	288	592	500	5	ePM1-70%	F8	1700	81	1056
	NW95 490x592x500, 8p	490	592	500	8	ePM1-70%	F8	2800	81	1056
18872	NW95 288x288x500, 5p	288	288	500	5	ePM1-70%	F8	850	81	1056
18807	NW95 592x288x500, 10p	592	288	500	10	ePM1-70%	F8	1700	81	1056
	NW95 592x490x500, 10p	592	490	500	10	ePM1-70%	F8	2800	81	1056
18810	NW95 592x592x600, 8p	592	592	600	8	ePM1-70%	F8	3400	81	1067
18811	NW95 288x592x600, 4p	288	592	600	4	ePM1-70%	F8	1700	81	1067
18812	NW95 490x592x600, 6p	490	592	600	6	ePM1-70%	F8	2800	81	1067
18818	NW95 288x288x600, 4p	288	288	600	4	ePM1-70%	F8	850	81	1067
18820	NW95 592x288x600, 8p	592	288	600	8	ePM1-70%	F8	1700	81	1067
18819	NW95 592x490x600, 8p	592	490	600	8	ePM1-70%	F8	2800	81	1067
18884	NW95 592x592x600, 10p	592	592	600	10	ePM1-70%	F8	3400	74	936
110132	NW95 288x592x600, 5p	288	592	600	5	ePM1-70%	F8	1700	74	936
	NW95 490x592x600, 8p	490	592	600	8	ePM1-70%	F8	2800	74	936
18832	NW95 288x288x600, 5p	288	288	600	5	ePM1-70%	F8	850	74	936
110133	NW95 592x288x600, 10p	592	288	600	10	ePM1-70%	F8	1700	74	936
	NW95 592x490x600, 10p	592	490	600	10	ePM1-70%	F8	2800	74	936