

NW98 ES

Bag filters with nanowave synthetic filter medium, filter class ISO ePM1-90%



APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- Very low initial resistance
- High dust-holding capacity, long service life
- Low energy consumption
- Self-supporting medium
- Eurovent certified

SPECIFICATIONS

- Medium: Nanowave synthetic
- Frame: Steel, also available in wood, plastic and a reusable LFC frame
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 80°C
- Maximum relative humidity: 100%

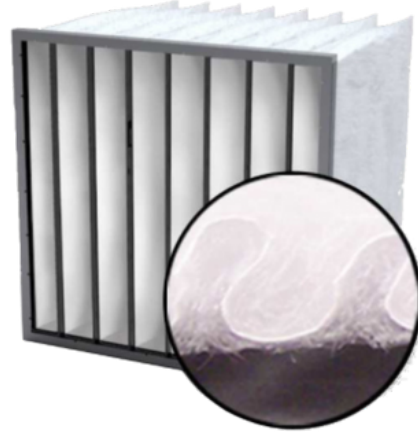

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN 779:2012	FLOW RATE m³/U	ΔP INITIAL	KWH/J 4/21-2018	ENERGY CLASS
NW98 ES 592x592x360, 8p	592	592	360	8	ePM1-90%	F9	3400	149	2172	D
NW98 ES 288x592x360, 4p	288	592	360	4	ePM1-90%	F9	1700	149	2172	
NW98 ES 490x592x360, 6p	490	592	360	6	ePM1-90%	F9	2800	149	2172	
NW98 ES 592x592x360, 10p	592	592	360	10	ePM1-90%	F9	3400	129	1797	C
NW98 ES 288x592x360, 5p	288	592	360	5	ePM1-90%	F9	1700	129	1797	
NW98 ES 490x592x360, 8p	490	592	360	8	ePM1-90%	F9	2800	129	1797	
NW98 ES 592x592x580, 8p	592	592	580	8	ePM1-90%	F9	3400	96	1250	A
NW98 ES 288x592x580, 4p	288	592	580	4	ePM1-90%	F9	1700	96	1250	
NW98 ES 490x592x580, 6p	490	592	580	6	ePM1-90%	F9	2800	96	1250	
NW98 ES 592x592x580, 10p	592	592	580	10	ePM1-90%	F9	3400	84	1217	A
NW98 ES 288x592x580, 5p	288	592	580	5	ePM1-90%	F9	1700	84	1217	
NW98 ES 490x592x580, 8p	490	592	580	8	ePM1-90%	F9	2800	84	1217	

Custom sizes available on request