

NW98

Bag filters with nanowave synthetic filter medium, filter class ISO ePM1-90%



APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

BENEFITS

- Very low initial resistance
- High dust-holding capacity, long service life
- Low energy consumption
- Self-supporting medium
- Eurovent certified

SPECIFICATIONS

- Medium: Nanowave synthetic
- Frame: Steel, also available in wood and plastic and a reusable LFC frame
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 80°C
- Maximum relative humidity: 100%

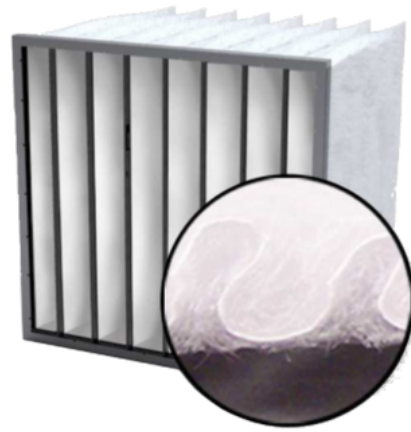

DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	ISO COARSE 16890	CLASS EN 779:2012	FLOW RATE m³/U	ΔP INITIAL	KWH/J 4/21-2018	ENERGY CLASS
NW98 592x592x360, 8p	592	592	360	8	ePM1-90%	F9	3400	228	>2500	E
NW98 288x592x360, 4p	288	592	360	4	ePM1-90%	F9	1700	228	>2500	
NW98 490x592x360, 6p	490	592	360	6	ePM1-90%	F9	2800	228	>2500	
NW98 592x592x360, 10p	592	592	360	10	ePM1-90%	F9	3400	198	2616	E
NW98 288x592x360, 5p	288	592	360	5	ePM1-90%	F9	1700	198	2616	
NW98 490x592x360, 8p	490	592	360	8	ePM1-90%	F9	2800	198	2616	
NW98 592x592x535, 8p	592	592	535	8	ePM1-90%	F9	3400	155	2001	D
NW98 288x592x535, 4p	288	592	535	4	ePM1-90%	F9	1700	155	2001	
NW98 490x592x535, 6p	490	592	535	6	ePM1-90%	F9	2800	155	2001	
NW98 592x592x535, 10p	592	592	535	10	ePM1-90%	F9	3400	147	1837	C
NW98 288x592x535, 5p	288	592	535	5	ePM1-90%	F9	1700	147	1837	
NW98 490x592x535, 8p	490	592	535	8	ePM1-90%	F9	2800	147	1837	
NW98 592x592x635, 8p	592	592	635	8	ePM1-90%	F9	3400	119	1397	A
NW98 288x592x635, 4p	288	592	635	4	ePM1-90%	F9	1700	119	1397	
NW98 490x592x635, 6p	490	592	635	6	ePM1-90%	F9	2800	119	1397	
NW98 592x592x635, 10p	592	592	635	10	ePM1-90%	F9	3400	118	1392	A
NW98 288x592x635, 5p	288	592	635	5	ePM1-90%	F9	1700	118	1392	
NW98 490x592x635, 8p	490	592	635	8	ePM1-90%	F9	2800	118	1392	

Custom sizes available on request.