


# Composite Vapour slang SST

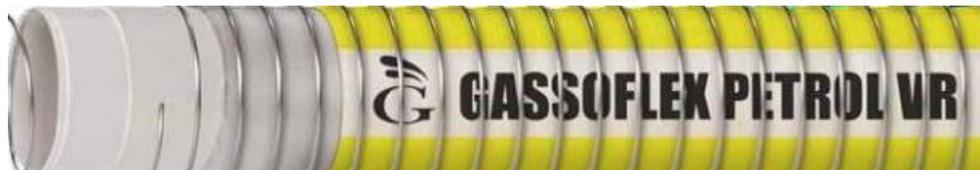

## Applications

Gassoflex Vapour SST is recommended for supply of a wide variety of Chemicals and acids compatible with ECTFE and stainless steel  
It is suitable for use in loading and unloading tankers, wagons, in plants and marine applications.

## Functions

Standards : EN 13765:2018  
Temperature range : -30 0C a +100 0C  
Safety factor : 5:1  
Vacuum : 0.9 bar  
Working pressure : 7 bar

## Construction

Inner wire spiral : Stainless Steel 316L (S)  
Outer wire spiral : Stainless Steel 316L (S)  
Inner lining : ECTFE  
Cover : PVC Coated polyester cloth