

TT606

Aluminiumnitrogen membrane module

Minimum Outlet Flow Rate ⁽¹⁾



Inlet Pressure		Purity (Remaining Oxygen Content)											
		99.5% (0.5%)		99.0% (1.0%)		98.0% (2.0%)		97.0% (3.0%)		96.0% (4.0%)		95.0% (5.0%)	
bar(g)	psi(g)	m3/hr	cfm	m3/hr	cfm	m3/hr	cfm	m3/hr	cfm	m3/hr	cfm	m3/hr	cfm
5.0	72.5	2.4	1.4	3.4	2.0	5.2	3.0	6.8	4.0	8.4	4.9	10.1	5.9
6.0	87.0	2.9	1.7	4.3	2.6	6.5	3.8	8.6	5.1	10.6	6.2	12.8	7.5
7.0	101.5	3.4	2.0	5.1	3.0	7.6	4.5	10.1	5.9	12.4	7.3	15.0	8.8
8.0	116.0	3.9	2.3	5.8	3.4	8.7	5.1	11.5	6.8	14.2	8.4	17.1	10.1
9.0	130.5	4.5	2.6	6.6	3.9	10.1	5.9	13.3	7.8	16.4	9.7	19.5	11.5
10.0	145.0	4.9	2.9	7.2	4.3	10.9	6.4	14.4	8.5	17.7	10.4	21.4	12.6
11.0	159.5	5.3	3.1	7.9	4.6	12.0	7.1	15.8	9.3	19.7	11.6	23.8	14.0
12.0	174.0	5.7	3.3	8.5	5.0	13.1	7.7	17.2	10.1	21.6	12.7	26.2	15.4

⁽¹⁾ Maximum outlet flow rate = 'Minimum outlet flow rate' + 30.0%
m³ reference to standard conditions, 20°C, 1013 mbar(a) and 0% relative water vapour pressure.
For performance figures at other purities and/or pressures, please contact Parker.

Temperature Correction Factors

°C	°F	99.5% (0.5%)	99.0% (1.0%)	98.0% (2.0%)	97.0% (3.0%)	96.0% (4.0%)	95.0% (5.0%)
≤10.0	50.0	0.9	0.90	0.90	0.90	0.90	0.90
20.0	68.0	1.00	1.00	1.00	1.00	1.00	1.00
30.0	86.0	1.00	1.00	1.00	1.00	1.00	1.00
40.0	104.0	0.60	0.80	1.00	1.00	1.10	1.10
50.0	122.0	0.60	0.80	1.00	1.10	1.10	1.20

Product Image*



Operation Parameters


Minimum Inlet Air Quality	ISO 8573-1: 2010 Class 2.4.1	
Minimum Operating Pressure	4.0 bar(g)	58.0 psi(g)
Maximum Operating Pressure	12.0 bar(g)	174.0 psi(g)
Minimum Operating Temperature	5.0°C	41.0°F
Maximum Operating Temperature	50.0°C	122.0°F
Maximum Pressure Drop	0.8 bar(g)	11.6 psi(g)

Material & Connections

Material	Aluminium & PVC
Coating	None
Compressed Air Inlet	G½"
Exhaust	G½"
Nitrogen Outlet	G½"

Weight & Dimensions

Weight	15.0 kg	33.0 lbs
Height	751 mm	29.5"
Width	270 mm	10.6"
Depth	84 mm	3.3"

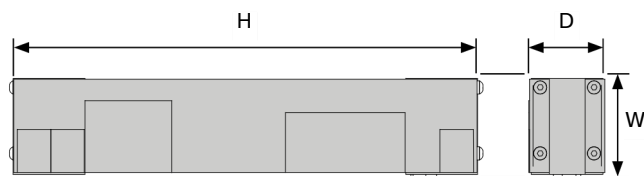

*Image for representation purposes only. Please visit www.parker.com/membranegasseparation to download the engineering drawings and 3D model files, for an exact configuration.

NITROGEN MEMBRANE PART NUMBER CONFIGURATION

Configurator																												
T	T	6	0	6	-				-			-	A	-	0	0	A											
Model	Prefix	Purity		Prefix		Pressure		Prefix		Housing		Suf fix																
TT606	TT606	95.0%		950		5.0 bar(g)		05		TT606		A																
		96.0%		960		6.0 bar(g)		06																				
		97.0%		970		7.0 bar(g)		07																				
		98.0%		980		8.0 bar(g)		08																				
		99.0%		990		9.0 bar(g)		09																				
		99.5%		995		10.0 bar(g)		10																				
						11.0 bar(g)		11																				
						12.0 bar(g)		12																				

Part number configuration should be based on end user requirement to meet their application/process needs.

Example:

	Flow Rate				Purity				Pressure				Housing Material				Suf fix		
Requirement:	13.5m³/hr				@ 95.0%				7.0 bar(g) inlet				Aluminium				00A		
Selection:	15.0m³/hr				950				07				A						
Part Number:	T	T	6	0	6	-	9	5	0	-	0	7	-	A	-	0	0	A	



Avilo Stikstof en Persluchtssystemen B.V.

part of interfilter group

Seggeweg 2, 3237 MK Vierpolders

www.avilo.nl

Reference: TSS-DT1506_EN_00

© 2025 Parker Hannifin Corporation

