

# NW98

Bag filters with Nanowave synthetic filter medium, filter class ISO ePM1-90%

## APPLICATIONS


- Fine filtration for air handling units and pre-filtration for (H)EPA filters

## BENEFITS

- Very low initial resistance
- High dust-holding capacity, long service life
- Low energy consumption
- Self-supporting medium
- Eurovent certified through the manufacturer Deltrian

## SPECIFICATIONS

- Medium: Nanowave synthetic
- Frame: Steel, also available in wood and plastic
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70°C
- Maximum relative humidity: 100%

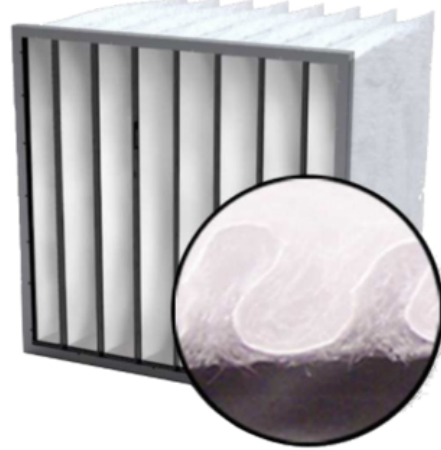

ARTICLE NO.	DESCRIPTION	WIDTH (A) MM	HEIGHT (B) MM	LENGTH (C) MM	NUMBER OF POCKETS	CLASS ISO 16890	CLASS EN779:2012	FLOW RATE M3/U	ΔP INITIAL	KWH/J 4/21-2018
18993	<b>NW98 592x592x500, 8p</b>	592	592	500	8	ePM1-90%	F9	3400	155	2001
18994	<b>NW98 288x592x500, 4p</b>	288	592	500	4	ePM1-90%	F9	1700	155	2001
18934	<b>NW98 490x592x500, 6p</b>	490	592	500	6	ePM1-90%	F9	2800	155	2001
18975	<b>NW98 288x288x500, 4p</b>	288	288	500	4	ePM1-90%	F9	850	155	2001
109705	<b>NW98 592x288x500, 8p</b>	592	288	500	8	ePM1-90%	F9	1700	155	2001
18965	<b>NW98 592x490x500, 8p</b>	592	490	500	8	ePM1-90%	F9	2800	155	2001
18910	<b>NW98 592x592x600, 8p</b>	592	592	600	8	ePM1-90%	F9	3400	119	1397
18911	<b>NW98 288x592x600, 4p</b>	288	592	600	4	ePM1-90%	F9	1700	119	1397
18912	<b>NW98 490x592x600, 6p</b>	490	592	600	6	ePM1-90%	F9	2800	119	1397
18918	<b>NW98 288x288x600, 4p</b>	288	288	600	4	ePM1-90%	F9	850	119	1397
18920	<b>NW98 592x288x600, 8p</b>	592	288	600	8	ePM1-90%	F9	1700	119	1397
18919	<b>NW98 592x490x600, 8p</b>	592	490	600	8	ePM1-90%	F9	2800	119	1397
18931	<b>NW98 592x892x600, 8p</b>	592	892	600	8	ePM1-90%	F9	5100	119	1397
241961	<b>NW98 288x892x600, 4p</b>	288	892	600	4	ePM1-90%	F9	2550	119	1397
18933	<b>NW98 490x892x600, 6p</b>	490	892	600	6	ePM1-90%	F9	4200	119	1397

Custom sizes on request.